





## Turner Suspension double emission

Modular linear profile in extruded aluminum, with opal or microprismatic polycarbonate diffuser UGR<19. Available in 29W+15W/m. warm white or natural. Integrated power supply for On/Off and DALI; emergency module available on demand. Suitable to be installed as suspension in the bidirectional configuration. Complete with suspension and power cable max 2m.

|                                      |   |
|--------------------------------------|---|
| <b>Code</b>                          | <b>6853-24-101</b>  |
| <b>Type</b>                          | Light Line Profiles - Suspension double emission                                  |
| <b>Designer</b>                      | S.T. Fabas Luce   |
| <b>Eancode</b>                       | 8019282093725   |
| <b>Customs tariff</b>                | 94054239  |
| <b>Color</b>                         | Aluminum  |
| <b>Material</b>                      | Aluminum frame  |
| <b>IP</b>                            | IP40  |
| <b>IK</b>                            | 08  |
| <b>Insulation Class</b>              |  |
| <b>Operating ambient temperature</b> | -20C° +45°  |
| <b>Years of warranty</b>             | 5   |
| <b>Made In</b>                       | Italy   |
| <b>Item Dimensions</b>               | 77x95xMax 2000mm - 3,950/mtkg   |



|                                  | Light Source 1  | Light Source 2  |
|----------------------------------|---|---|
| <b>Light source</b>              | LED Built-in  | LED Built-in  |
| <b>LED Characteristics</b>       | SMD   | SMD   |
| <b>Number of LEDs</b>            | 70 LED/m  | 140 LED/mt  |
| <b>Light Source Lumen</b>        | 3570 lm/m   | 1440 lm/m   |
| <b>Item Lumen</b>                | 2136 lm/m   | 1185 lm/m   |
| <b>Color Temperature</b>         | Natural white 4000 K  | Natural white 4000 K  |
| <b>Optics</b>                    | Opal  | Opal  |
| <b>Typical CRI</b>               | 85  |   |
| <b>Minimum CRI</b>               | 80  | 80  |
| <b>Luminous Flux Maintenance</b> | >100.000 h L70 B50  | >80.000 h L70 B50   |
| <b>Energy Efficiency Class</b>   |  |  |

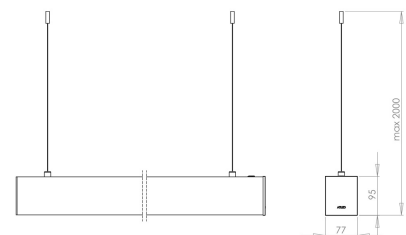

| Electrical specifications 1 |                        |
|-----------------------------|------------------------|
| <b>Input Voltage</b>        | 220 - 240V AC 50/60 Hz |
| <b>Total Absorbed Power</b> | 29W/ml                 |
| <b>Driver</b>               | Included               |
| <b>Control System</b>       | On/Off                 |
| <b>Power Supply Type</b>    | Costant Current        |
| <b>Driver Output</b>        | 24V DC                 |
| <b>Driver Input</b>         | 220 - 240 VAC 50/60 Hz |

