





Millet Wall lamp

Extruded aluminium profile with 10 cm pitch cut-to-size. Dual light emission, 23W/m downwards, 15W/m upwards. Diffuser in opal or prismatic polycarbonate UGR<19. Available in 3000K or 4000K temperatures. Integrated for On/Off and DALI power supplies, emergency module available on request. Designed to be installed on wall, both vertically and horizontally.

| | |
|--------------------------------------|---|
| Code | 6992-64-222 |
| Type | Light Line Profiles – Wall lamp |
| Designer | S.T. Fabas Luce |
| Eancode | 8019282556787 |
| Customs tariff | 94054239 |
| Color | Black |
| Material | Aluminum frame and polycarbonate |
| IP | IP40 |
| IK | 08 |
| Insulation Class |  |
| Operating ambient temperature | -25C° +45C° |
| Years of warranty | 5 |
| Made In | Italy |
| Item Dimensions | 46x70mm - 2.2/mkg |



| | Light Source 1 | Light Source 2 |
|--------------------------------|---|---|
| Light source | LED Built-in | LED Included |
| LED Characteristics | SMD | SMD |
| Number of LEDs | 80 LED/mt | 140 LED/mt |
| Light Source Lumen | 3580 lm/m | 1440 lm/m |
| Item Lumen | 2346 lm/m | 1067 lm/m |
| Color Temperature | Natural white 4000 K | Natural white 4000 K |
| Optics | Prismatic | Opal |
| Typical CRI | 85 | |
| Minimum CRI | 80 | 80 |
| Luminous Flux | >100.000 h L80 B10 | >80.000 h L70 B50 |
| Maintenance | | |
| UGR | <19 | |
| Energy Efficiency Class |  |  |

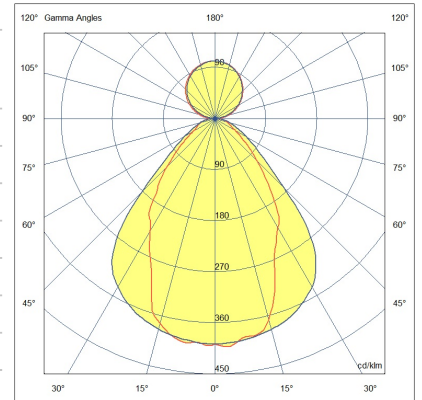

| | Electrical specifications 1 | Electrical specifications 2 |
|-----------------------------|------------------------------------|------------------------------------|
| Input Voltage | 220 - 240V AC 50/60 Hz | 220 - 240V AC 50/60 Hz |
| Total Absorbed Power | 23W/ml | 15W/ml |
| Driver | Included | Included |
| Control System | DALI | DALI |
| Power Supply Type | Costant Current | Costant Current |
| Driver Output | 350mA | 24V DC |
| Driver Input | 220 - 240 VAC 50/60 Hz | 220 - 240 VAC 50/60 Hz |